


RF Coaxial Connectors


Coaxial FAKRA Connectors VC-2 Series

- Push-on mold locking structure
- Key codes are available in different colors for different connection
- Complies with ISO20860-1,ISO20860-2,DIN72594-1,DIN72594-2,SAE/USCAR-17, and SAE/USCAR-18
- Waterproof type is also available (mating waterproof of IPX7)
- Nominal Impedance: 50Ω
- Operating Temperature Range: -40°C to +105°C
- \Box : Part no. differs by key codes and color codes. Please contact us for more information.


Plug for PCB · Single · Flow · DIP

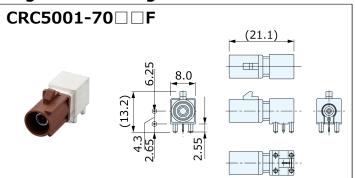

Plug for PCB · Single · Reflow · DIP




Cable Plug · Single

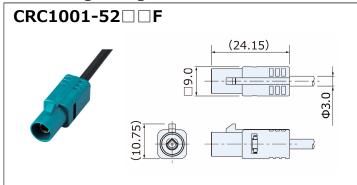


Cable Plug · Single


Waterproof

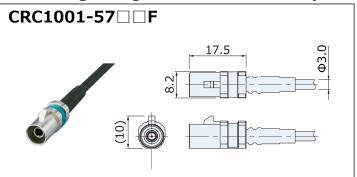


Plug for PCB \cdot Single \cdot Reflow \cdot SMT

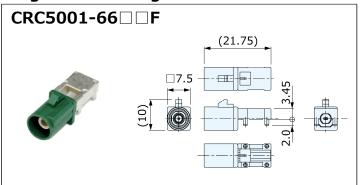

Plug for PCB · Single · Reflow · SMT

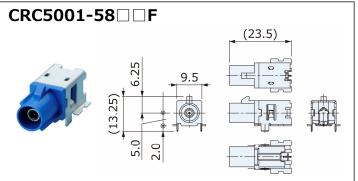

Cable Plug · Single

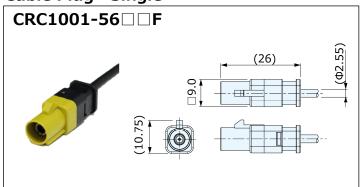




RF Coaxial Connectors

Coaxial FAKRA Connectors VC-2 Series

Cable Jack \cdot Single

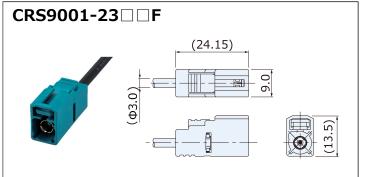

Cable Jack \cdot Single

Waterproof

