

Interface Connectors


USB 2.0 Standard-A receptacle

■ Features

1. Low profile of 10.5mm height when mounted.
2. Four pins design, 2 each for power and signal.
3. Officially qualified for USB2.0 High speed certification.
4. PCB snap-fit designed.

■ Specifications

- Number of Pins : 4
- Mounting Method : DIP
- Mounting Direction : Vertical
- Rating : 30V AC, 1A
- Contact Resistance : 30mΩ max
- Insulation Resistance : 1000MΩ min. at 100V DC
- Withstanding Voltage : 750V AC (for one minute)
- Operating Temperature Range : -25°C to +80°C
- Operating Life : 1500 cycles

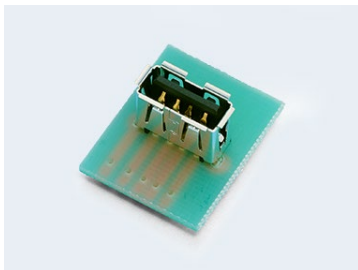

CSS5004-5T01F

